

10670

ADJUSTABLE VERTICAL CLAMPS

Material

Body: aluminium.
Clamping piece: steel.

downward simply with a turn of the hex key.
Very compact, powerful and quick acting.

using on a spacer element or using our standard spacers (see part no. 10671).
Supplied with clamping key and clamping screw (M10 x 35mm).



Technical Notes

Unique double action, moves forward and

Tips

Clamping height can be easily adjusted by

Order No.	Clamping force kN max.	Clamping height h_1 min. max.	Clamping reach l_1	h_2	h_3	l_2	l_3	l_4	w_1	w_2	A/F	Torque to Nm max.
10670.W0020	11	22 to 26	30	67	16.5	115	65	18	50	25	8	20

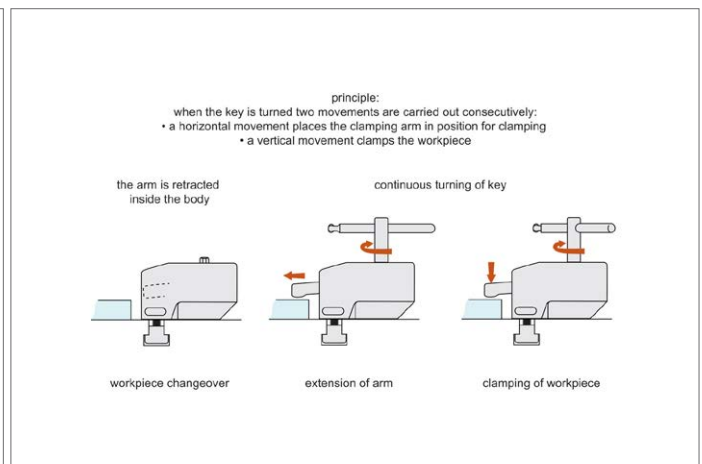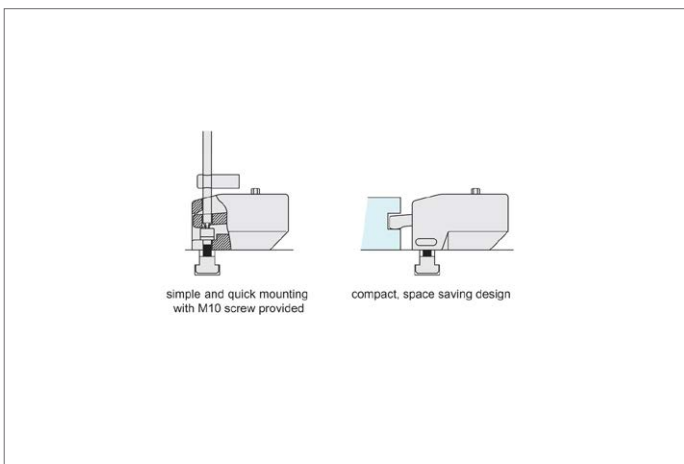



A Wide Range of Clamps to Match any Requirement

CLAMPING FORCE
**UPTO
50000
NEWTONS**

10650 All machining operations




10655 Light machining



10658 Electrical discharge machining




10660 Clamping and lifting

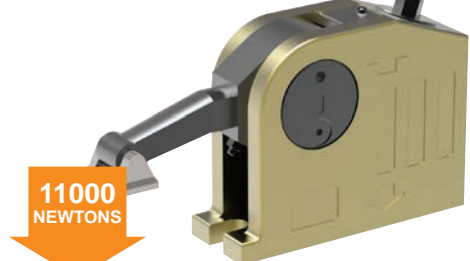

10661 Heavy machining




10670 Repetitive machining

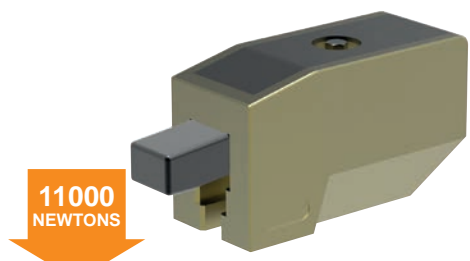

10675 Heavy machining



10678 Press Tool Clamping

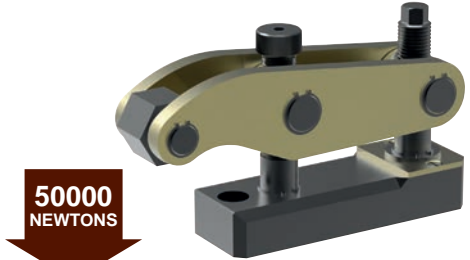

ADJUSTABLE VERTICAL CLAMPS




Monobloc Clamps

stackable vertical clamping




Clamping & Height Setting

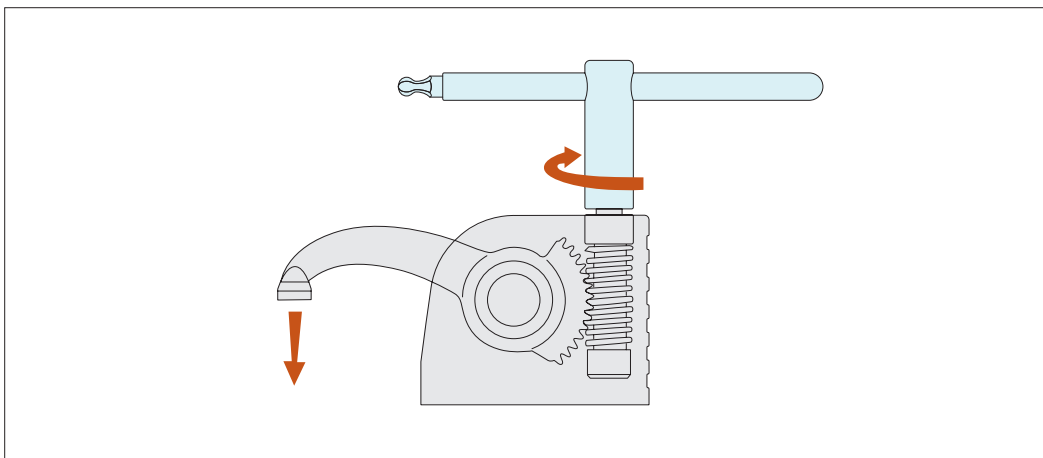


Slide the T-nut into the T-slot position and tighten the clamp onto the T-slot base, with the aid of the clamp key (shown in the image in blue).

Clamp the workpiece by twisting the key. Start machining.

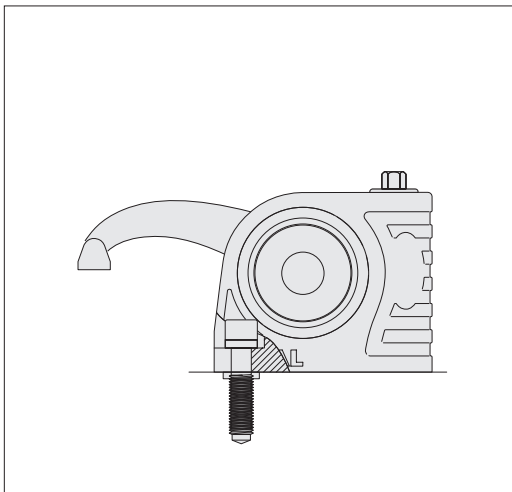


Fix to threaded bases with a special screw M10, M12, M14, M16.

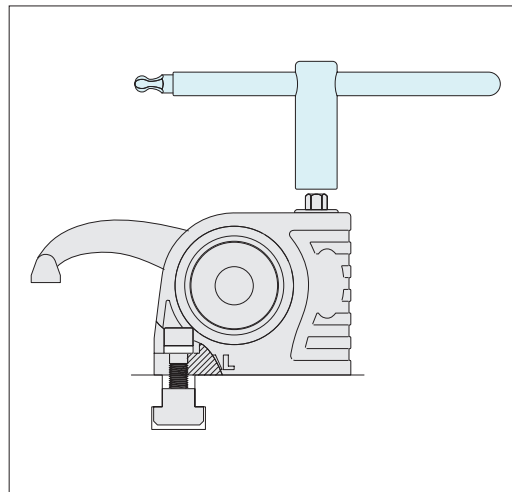

Fix to T-slots with suitable T-nuts.

When unclamped the arm and the clamp remain in position

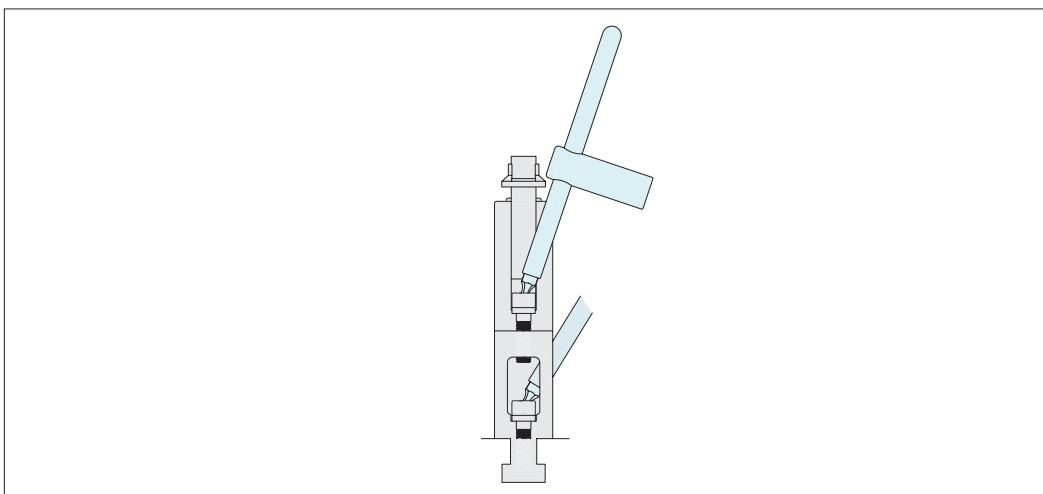

The clamps are easily stackable to achieve required clamping height.

ADJUSTABLE VERTICAL CLAMPS