




Levelling Feet

pad thermoplastic, bolt stainless steel

Levelling Feet

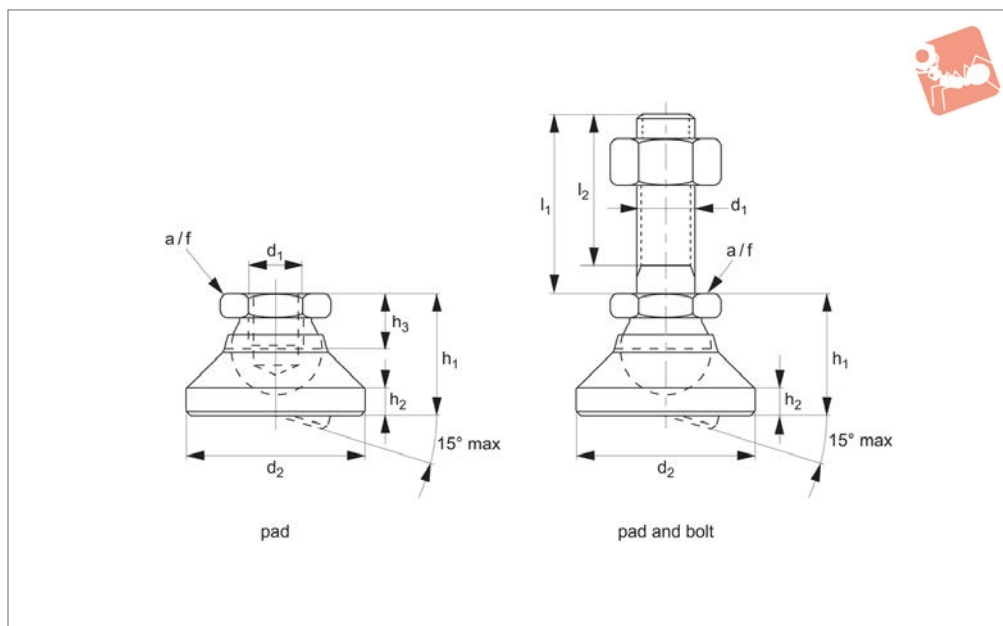

34760

LEVELLING FEET

Material

Pad: white thermoplastic (POM).

Bolt: stainless steel 1.4305 (AISI 303).

Lock nut: Stainless steel A2, DIN 934/ISO 4032.

Technical Notes

For use as feet and thrust pads.

Order No.	Type	d ₁	l ₁	d ₂	l ₂	h ₁ ≈	h ₂	h ₃	Static load kN max.	A/F	Weight g
34760.W0106	Pad	M 6	-	20	-	14	2.5	5.0	4	10	6
34760.W0108	Pad	M 8	-	25	-	18	4.0	7.0	7	13	13
34760.W0110	Pad	M10	-	32	-	22	5.0	9.0	10	17	26
34760.W0112	Pad	M12	-	40	-	26	6.0	11.0	18	19	40
34760.W0116	Pad	M16	-	50	-	32	7.0	13.5	20	24	75
34760.W0120	Pad	M20	-	60	-	42	8.0	17.0	22	30	120
34760.W0124	Pad	M24	-	60	-	45	9.5	19.0	25	36	184
34760.W0510	Pad and Bolt	M 6	60	20	57.0	14	2.5	-	4	10	20
34760.W0522	Pad and Bolt	M 8	80	25	76.0	18	4.0	-	7	13	46
34760.W0538	Pad and Bolt	M10	100	32	95.5	22	5.0	-	10	17	92
34760.W0542	Pad and Bolt	M10	150	32	145.5	22	5.0	-	10	17	118
34760.W0552	Pad and Bolt	M12	100	40	94.5	26	6.0	-	18	19	139
34760.W0556	Pad and Bolt	M12	150	40	144.5	26	6.0	-	18	19	173
34760.W0568	Pad and Bolt	M16	100	50	94.0	32	7.0	-	20	24	264
34760.W0572	Pad and Bolt	M16	200	50	194.0	32	7.0	-	20	24	393
34760.W0582	Pad and Bolt	M20	100	60	92.5	42	8.0	-	22	30	463
34760.W0588	Pad and Bolt	M20	200	60	192.5	42	8.0	-	22	30	664
34760.W0595	Pad and Bolt	M24	100	60	91.0	45	9.5	-	25	36	662
34760.W0598	Pad and Bolt	M24	200	60	191.0	45	9.5	-	25	36	960



LEVELLING FEET

