



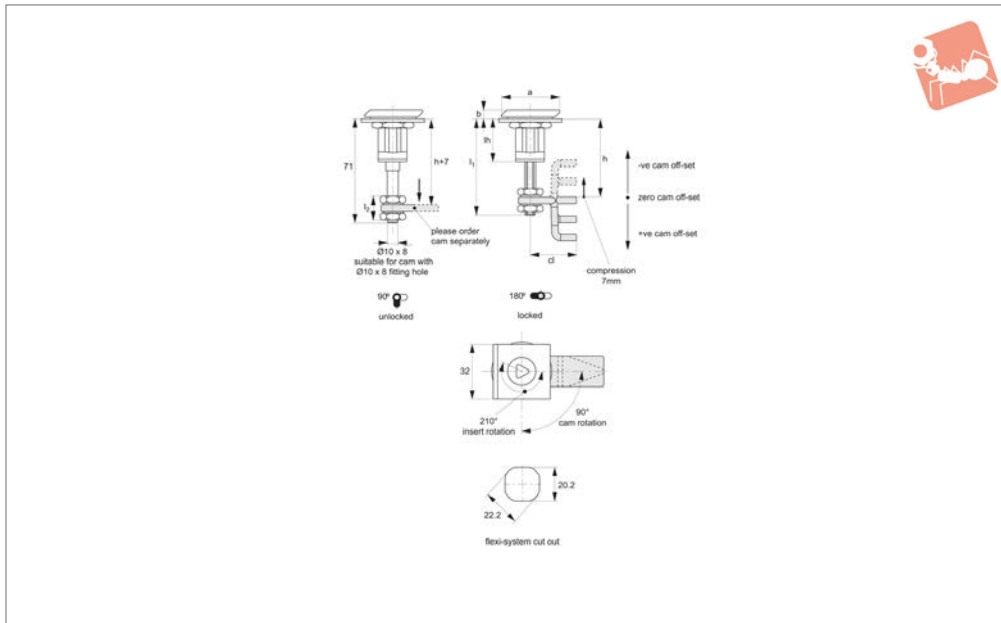

# Compression Latches - Flexi-System

square face - adjustable grip - zinc

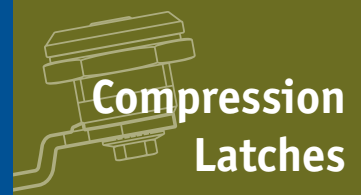

**A1630**

COMPRESSION LATCHES

**Material**

Body & insert: die cast zinc, black powder coated. Fitted with O'ring to provide IP54 rating.

**Not supplied:** CAM nor KEY - order separately.

**Technical Notes**

Order cam and key separately.

**Cams:** see suitable cam A0231 and A0233. Select „without projection“ cam type.

Dimensions ch and cl relate to cam. Use formula to calculate ch (required cam off-set), and refer to cam selection chart;

**ch = h - lh** where;

**ch** = required cam off-set/height.

**h** = grip length (distance between inside of

latch face and front of cam).

**lh** = body length of cam latch/lock to be used (see product table below).

**Keys:** see A0102.

Order No.	Insert driver	Type	a	b	lh	l <sub>1</sub>	l <sub>2</sub> useful thread
A1630.AW0020	Square 8	Adjustable	34	5	64	38	15
A1630.AW0040	Triangle 7	Adjustable	34	5	64	38	15
A1630.AW0050	Triangle 8	Adjustable	34	5	64	38	15
A1630.AW0080	Slot (2x4)	Adjustable	34	5	64	38	15
A1630.AW0085	Hexagon 8	Adjustable	34	5	64	38	15