




Cam Latches - Flexi-System

insert driver - push to close - fixed grip - zinc



Cam Latches

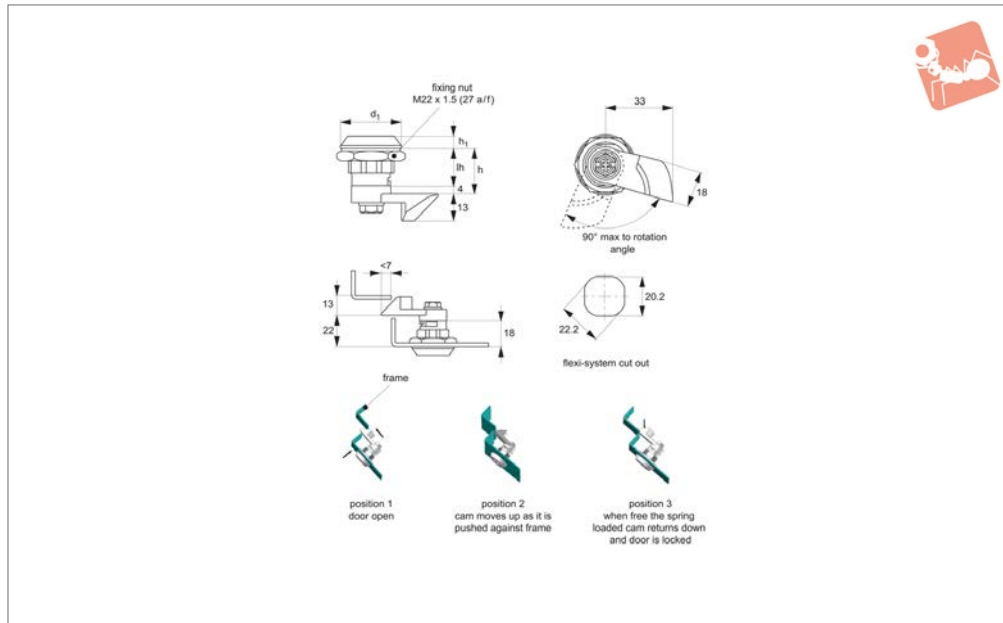

A1041

CAM LATCHES

Material

Body & Insert: die cast zinc, bright chrome plated.

Supplied with: Cam: die cast zinc, bright chrome plated - fixed off-set of 4mm.

Not supplied: KEY - order separately.

Technical Notes

Order key separately.

Keys: see A0102.

Tips

Spring loaded cam provides depress-to-lock action. See application drawings for operation. Quarter turn opening or closing. Right hand type for panel with hinges on right side, left hand type for panels with hinges on left side. Grip length of cam

fixed at 22mm (lh + 4mm).

Important Notes

Sold subject to pack quantity.

Order No.	Type	Insert driver	d ₁	h ₁	lh	h
A1041.AW0020	Right	Square 8	28	4	18	22
A1041.AW0050	Right	Triangle 8	28	4	18	22
A1041.AW0070	Right	4mm Double Bit	28	4	18	22
A1041.AW0080	Right	Slotted (2x4)	28	4	18	22
A1041.AW0520	Left	Square 8	28	4	18	22
A1041.AW0550	Left	Triangle 8	28	4	18	22
A1041.AW0570	Left	4mm Double Bit	28	4	18	22
A1041.AW0580	Left	Slotted (2x4)	28	4	18	22

Available insert drivers:

Square 8	Triangle 8	4mm Double Bit	2 x 4mm Slotted